

Cordomatic®

DELUXE SERIES

DROP LIGHT REELS

CORDOMATIC De Luxe Series DROP LIGHT REELS are marvellously convenient, time and money saving devices designed to outlast and out perform a dozen ordinary entangling drop cords. The CORDOMATIC REEL is a rugged and dependable piece of equipment that has built into it the skill and know-how of over a quarter of a century of experience in the manufacture of automatically controlled retracting reels for home and industry and is unsurpassed in the quality of workmanship and materials used in its construction. The CORDOMATIC REEL is the answer to the right light, where you want it... when you want it, in garages, stockrooms, loading platforms, construction jobs, workshops, warehouses, industrial plants, service stations or wherever a dependable and mobile light is required. CORDOMATIC REELS offer complete portability and can easily be installed wherever there is an outlet. No junction box is required. No added installation expense is necessary. Simply hang it up and plug it in. That's all there is to it.

WALL MOUNTED

Secure wall bracket with four screws and mount reel. 180° free swivel with this mounting. Special bracket-stop prevents reel from hitting wall.

full 360° rotation

CEILING MOUNTED

Sturdy, all steel, all chrome universal bracket permits optional wall or ceiling mounting.




SPECIFICATIONS

MODEL	CORD	LENGTH	DIAMETER	WIDTH	WEIGHT EACH
"700"	No. 18/2-SJO-7 AMP.	20'	7"	2"	5½ lbs.
"800"	"	30'	7½"	2⅞"	7¼ lbs.
"900"	"	40'	8"	2⅞"	8 lbs.
"S/900"	No. 16/2-SJO-10 AMP.	30'	8"	2⅞"	8 lbs.

Every Cordomatic Product is unconditionally GUARANTEED against defective workmanship and materials for one full year.



The ultimate in smart as well as functional design... Crack-proof phenolic pistol-grip handle... built-in strain relief and side convenience outlet all in one sturdy, compact, Underwriters' approved handle.



Fool-proof gravity action locking mechanism has nothing to break or jam... locks and releases with finger tip control at any desired length... heavy duty spring motor is dust-proof... life-time lubricated... nothing to clean or oil... entire electrical assembly completely Underwriters' approved.



Underwriters' approved SJ Neoprene cord features a kink-proof, moulded-into-core jacket construction... is oil and water resistant and equipped with an adjustable Neoprene stop ball.

Cordomatic®

GROUNDING TYPE

DROP LIGHT REELS

DE LUXE SERIES

CORDOMATIC GROUNDING TYPE DROP LIGHT REELS are designed for maximum safety and where state or municipal electrical codes require grounding circuits for electrical equipment. All of the superior operational and mechanical features found in the De Luxe Series 2-conductor models are built into these sturdy units.

WALL MOUNTING PROVIDES 180° FREE SWIVEL ►

CEILING MOUNTING PROVIDES 360° FULL ROTATION

All necessary hardware for both wall and ceiling mountings is supplied with reel.

Underwriters' approved grounding type moulded plug cap fits all standard grounded electrical outlets.

Light weight, compact and easy to work with, the crack-proof phenolic pistol-grip handle has grounded swing-open reflector guard, LEVOLIER toggle-action switch and socket... built-in strain relief and grounding type side convenience outlet... all in one sturdy, safety-engineered, Underwriters' approved handle.



SPECIFICATIONS

MODEL	CORD	LENGTH	DIAMETER	WIDTH	WEIGHT EACH
"800-G"	No. 18/3-SJO-7 AMP.	20'	7 1/2"	2 7/8"	7 lbs.
"900-G"	"	30'	8"	2 7/8"	7 3/4 lbs.
"S/900-G"	No. 16/3-SJO-10 AMP.	25'	8"	2 7/8"	7 3/4 lbs.

Every Cordomatic Product is unconditionally GUARANTEED against defective workmanship and materials for one full year.

Cordomatic®


DIVISION OF VACUUM CLEANER CORP. OF AMERICA—17th to 18th & Indiana Ave., Philadelphia 32, Pa.

full 360° rotation




CEILING MOUNTED

Sturdy, all steel, all chrome universal bracket permits optional wall or ceiling mounting.

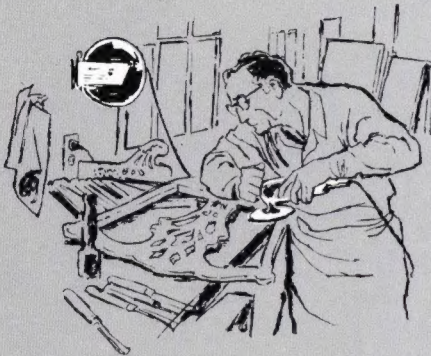

For saws, tapguns, grinders, screw drivers, sanders, polishers, drills or any electrical device requiring not more than 7 amperes.

(S-Models 10 Amperes)

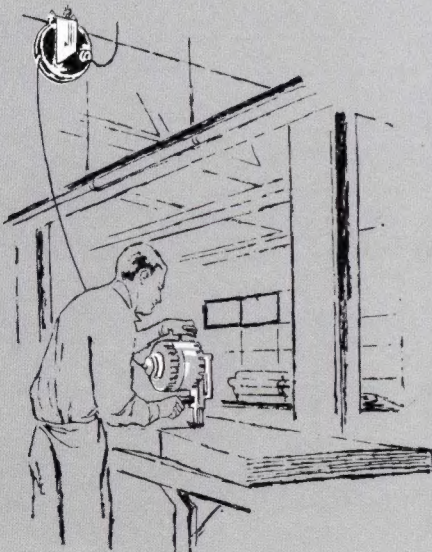


Cordomatic

Cordomatic[®]

DELUXE SERIES

DO-IT-YOURSELF REELS

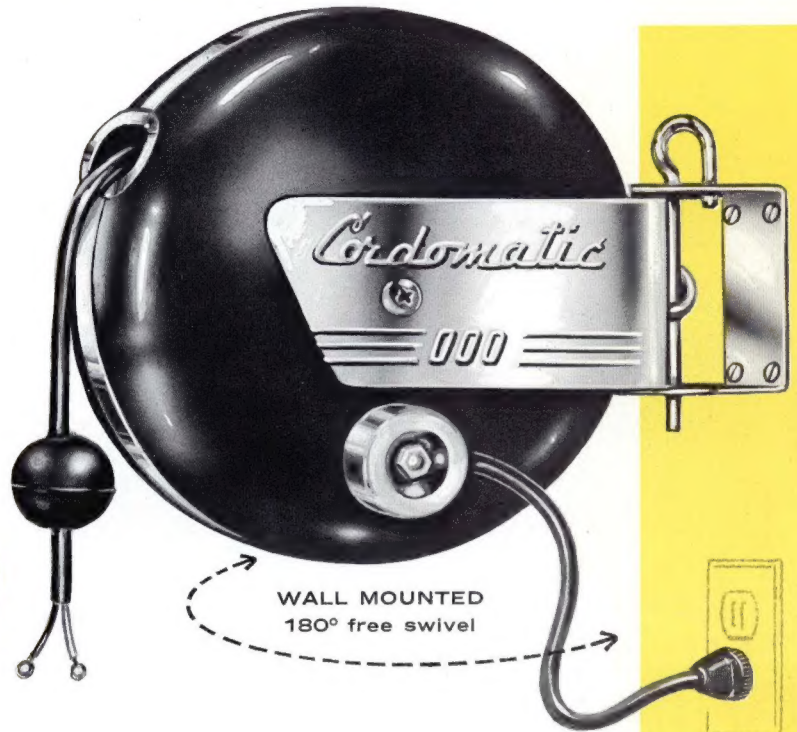

WALL MOUNTED
180° free swivel

The CORDOMATIC "DO-IT-YOURSELF" REEL is the answer to what to do with the dangling, entangling cord on YOUR particular electrical equipment or appliance. This CORDOMATIC reel is designed to enable the user to "customize" his own application by a simple connection of the cord leads to his equipment . . . resulting in immediate and automatic cord control. The CORDOMATIC "DO-IT-YOURSELF" REEL is available in 20, 30 and 40 foot lengths of Underwriters' approved SJ Neoprene cord featuring a kink-proof, moulded-into-core jacket construction . . . is oil and water resistant and equipped with a Neoprene stop ball. The exposed end leads are fitted with brass eyelets for ease in making solderless electrical connections using contact screws or they may be snipped off if a soldered connection is desired. Foolproof gravity action locking mechanism operates exactly like a window shade . . . locks and releases with finger tip control at any desired length. Heavy duty spring motor is dust-proof . . . life-time lubricated . . . nothing to clean or oil. Entire electrical assembly completely Underwriters' approved. Heavy gauge steel casing is smartly styled in a black vinyl finish . . . grease and oil resistant and set off by gleaming chrome trim.

SPECIFICATIONS

MODEL	CORD	LENGTH	DIAMETER	WIDTH	WEIGHT EACH
"700-LA"	No. 18/2-SJO-7 AMP.	20'	7"	2"	4 3/4 lbs.
"800-LA"	"	30'	7 1/2"	2 7/8"	6 1/2 lbs.
"900-LA"	"	40'	8"	2 7/8"	7 1/4 lbs.
"S/900-LA"	No.16/2-SJO-10 AMP.	30'	8"	2 7/8"	7 1/4 lbs.

GROUNDING TYPE

MODEL	CORD	LENGTH	DIAMETER	WIDTH	WEIGHT EACH
"800-G-LA"	No. 18/3-SJO-7 AMP.	20'	7 1/2"	2 7/8"	6 1/4 lbs.
"900-G-LA"	"	30'	8"	2 7/8"	7 lbs.
"S/900-G-LA"	No.16/3-SJO-10 AMP.	25'	8"	2 7/8"	7 lbs.

Every Cordomatic Product is unconditionally GUARANTEED against defective workmanship and materials for one full year.


DIVISION OF VACUUM CLEANER CORP. OF AMERICA—17th to 18th & Indiana Ave., Philadelphia 32, Pa.

PRINTED IN U.S.A.




VERTICAL MOUNTING
180° free swivel

Universal mounting bracket permits optional overhead or vertical surface mounting. Hardware for both types of mounting supplied with each reel.

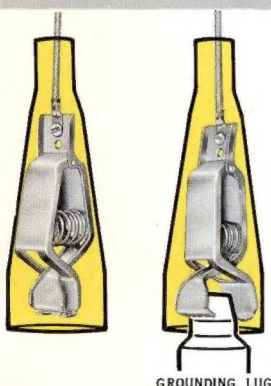

GROUNDING LUG

Heavy duty copper spring-clamp has a sliding neoprene guard to keep grounding connection weatherproof and dry.

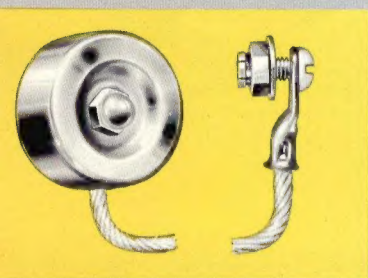


Continuous circuit grounding lead insures perfect ground... doesn't rely on reel alone for grounding connection... gives double grounding safety.

Cordomatic[®]

GROUNDING TYPE

STATIC DISCHARGE REELS

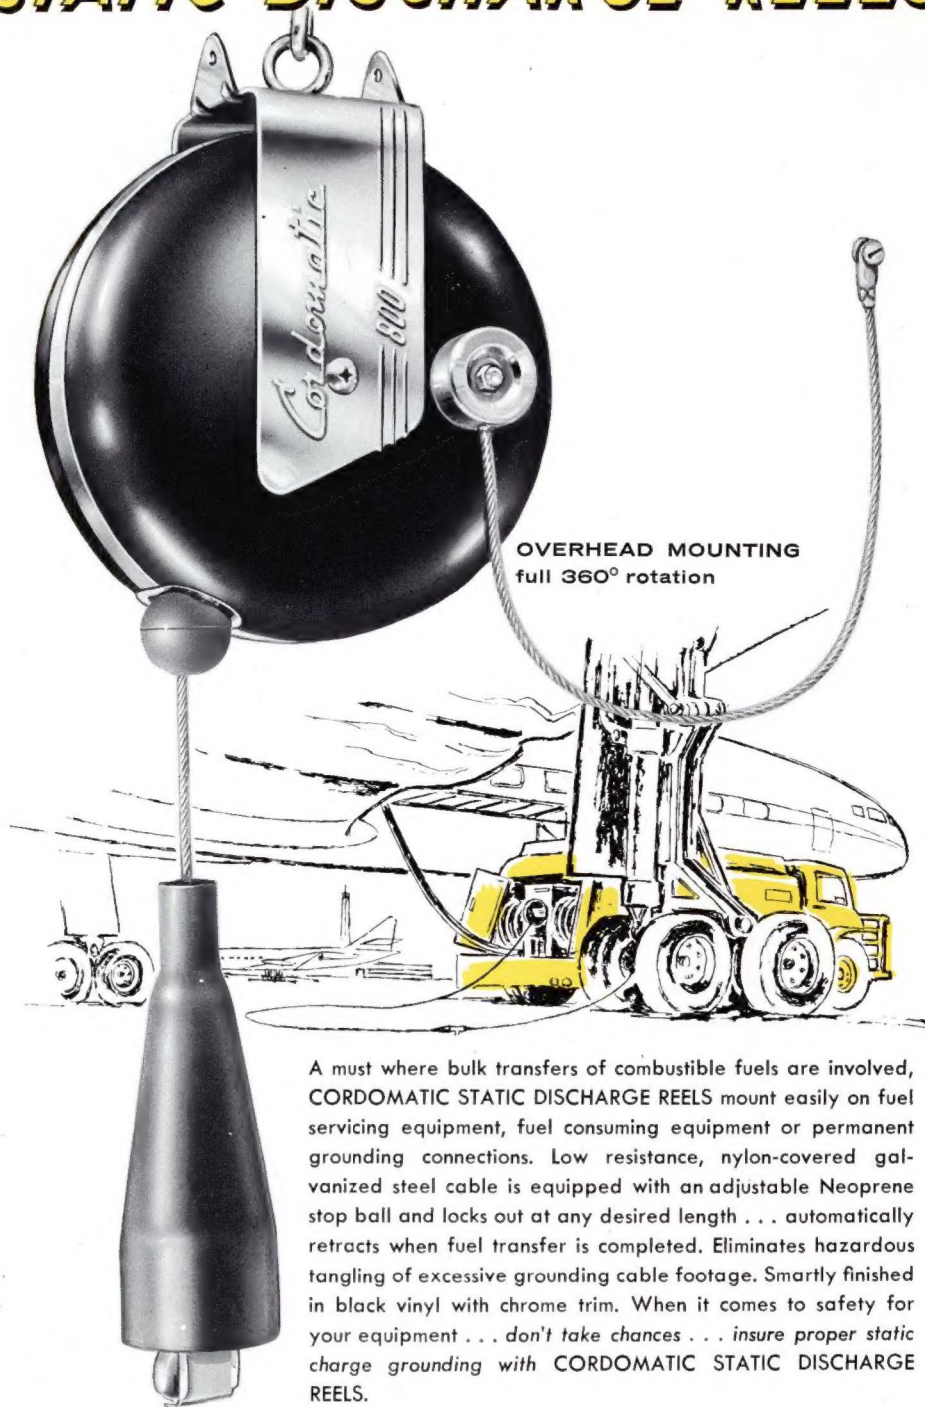

OVERHEAD MOUNTING
full 360° rotation

A must where bulk transfers of combustible fuels are involved, CORDOMATIC STATIC DISCHARGE REELS mount easily on fuel servicing equipment, fuel consuming equipment or permanent grounding connections. Low resistance, nylon-covered galvanized steel cable is equipped with an adjustable Neoprene stop ball and locks out at any desired length... automatically retracts when fuel transfer is completed. Eliminates hazardous tangling of excessive grounding cable footage. Smartly finished in black vinyl with chrome trim. When it comes to safety for your equipment... don't take chances... insure proper static charge grounding with CORDOMATIC STATIC DISCHARGE REELS.

SPECIFICATIONS

MODEL	CABLE	LENGTH	DIAMETER	WIDTH	WEIGHT EACH
"700-SDR"	5/32" nylon-covered	20'	7"	2"	4½ lbs.
"800-SDR"	flexible steel	45'	7½"	2⅞"	6¼ lbs.


Every Cordomatic Product is unconditionally **GUARANTEED** against defective workmanship and materials for one full year.

Cordomatic[®]

DIVISION OF VACUUM CLEANER CORP. OF AMERICA—17th to 18th & Indiana Ave., Philadelphia 32, Pa.



Model 700-BR
Electric Balance Reel

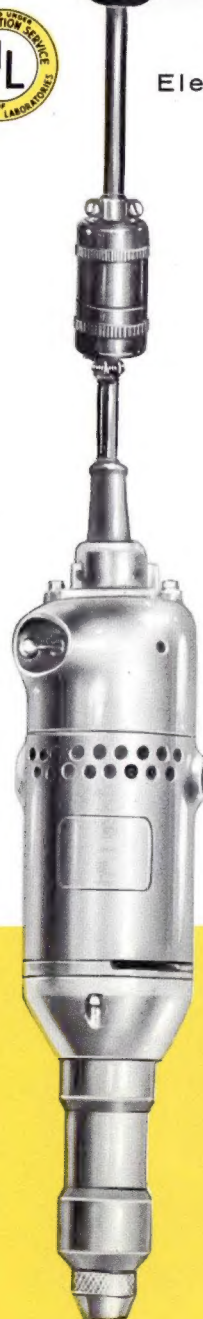

Cordomatic®

AUTOMATICALLY RETRACTING **BALANCE REELS**

- STOPS LOST MOTION
- KEEPS TOOLS ACCESSIBLE
- IMPROVES TOOL CONTROL
- SPEEDS PRODUCTION
- REDUCES OPERATOR FATIGUE

REQUIRES NO TOOLS TO MAKE ADJUSTMENTS

The CORDOMATIC ELECTRIC BALANCE REEL, with its Underwriters' approved grounding type electrical reel assembly, completely does away with the need for a separate wire cable to suspend electrical tools. Available with or without a Twist-Lock connector, these units incorporate all of the finest design features found most desirable for rugged production line use. No junction box is required. No added installation expense is necessary. Simply hang it up and plug it in.

SPECIFICATIONS

MODEL	CORD	EXTENSION	DIAMETER	WIDTH	WEIGHT	TENSION RANGE
700-BR*	No. 18/3-SJO—7 AMP.	10'	7"	2"	4-1/2 lbs.	0-7 lbs.
700-BR-LA	No. 18/3-SJO—7 AMP.	10'	7"	2"	4-1/2 lbs.	0-7 lbs.

*EQUIPPED WITH A GROUNDING TYPE TWIST-LOCK CONNECTOR ASSEMBLY

Every Cordomatic Product is unconditionally **GUARANTEED** against defective workmanship and materials for one full year.



◀ Twist-Lock connector, optional equipment on the Electric Balance Reel, permits multiple tool use. Tools can be easily changed for different job requirements or for routine maintenance.

Tension can be safely and easily adjusted by hand ▶ for various tools and working ranges. Special Tension Knob incorporates an automatic clutch which prevents back-lashing... prevents injury to fingers... prevents spring motor from being over-wound.



Cordomatic®

DIVISION OF VACUUM CLEANER CORP. OF AMERICA—17th to 18th & Indiana Ave., Philadelphia 32, Pa.

Cordomatic®

AUTOMATICALLY RETRACTING BALANCE REELS

Model 700-CR
Cable Balance Reel



The CORDOMATIC CABLE REEL, equally suitable for the suspension of electrical and non-electrical devices alike, is ideal for use with unwieldy air hose extensions, small parts bins, paint sprayer equipment, etc. as well as for heavier portable electrical tools.

- DUST-PROOF, HEAVY DUTY SPRING MOTOR
- LIFE-TIME LUBRICATED
- SELF-LUBRICATING OIL-LESS BEARINGS
- HEAVY GAUGE STEEL REEL HOUSING
- STYLED IN MAR-RESISTANT BLACK VINYL AND CHROME

SPECIFICATIONS


MODEL	CORD	LENGTH	DIAMETER	WIDTH	WEIGHT EA.	TENSION RANGE
700-CR	1/8" Nylon-Covered flexible steel	6'	7"	2"	4 1/4 lbs.	0-10 lbs.

All steel, all chrome reel housing bracket incorporates a heavy duty mounting ring which swivels 360° in either direction... can be suspended from a stationary overhead support or from a sliding trolley. Hardware for mounting is supplied with reel.

◀ Cable Reel is equipped with a replaceable cable extension consisting of a 6 ft. nylon-covered, stranded steel cable with a unique one piece, rubber cushioned cable stop that keeps suspended device at desired height... can be instantly readjusted without the use of tools. Cable terminates in a metal reinforced eye loop for easy tool attachment.



TYPICAL INSTALLATIONS

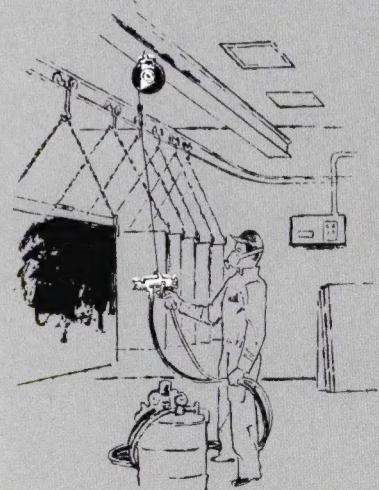

New from *Cordomatic*[®]

HEAVY DUTY DROP CORD SETS



Has convenient electric outlet built into handle!



Each Drop Cord Set is individually packaged in a compelling self-display carton.

Especially designed to take even the roughest handling, the Cordomatic Drop Cord Set is unmatched for quality and long life.

The Cordomatic Drop Cord Set has many exclusive features, including the well-known impact resistant phenolic pistol-grip handle. It's priced at a level to insure high volume sales to your customers . . . and full profits for you! Display the all new Cordomatic Drop Cord Sets . . . they'll sell on sight!

Entire Unit Underwriters' Approved

SPECIFICATIONS

MODEL	CORD LENGTH	SHIPPING WEIGHT (EACH)	RATING
125-DC	25 feet	2¼ lbs.	7 Amperes
150-DC	50 feet	3½ lbs.	7 Amperes

GROUNDING TYPE CORD SETS



Designed for maximum safety where electrical codes require grounding type equipment.

INTERNAL FEATURES

1. Convenient built-in grounded electric outlet is always "live" whether switch is ON or OFF.
2. Lightweight, impact-resistant phenolic pistol grip handle.
3. Cord wraps around built-in strain relief post . . . no screws or clamps to injure cord jacket.



Underwriters' approved grounding type molded plug cap fits all standard grounded electrical outlets.



Underwriters' approved heavy duty 18-3 SJ cord. It's completely kink proof and features a permanently attached molded grounding type plug. Oil and water resistant.

SPECIFICATIONS

MODEL	CORD LENGTH	SHIPPING WEIGHT (Each)	RATING
125 DCG	25 Feet	2¼ lbs.	7 amperes
150 DCG	50 Feet	3½ lbs.	7 amperes

EVERY CORDOMATIC[®] PRODUCT
UNCONDITIONALLY GUARANTEED
AGAINST DEFECTIVE WORKMANSHIP
AND MATERIALS FOR ONE FULL YEAR.

Cordomatic[®]


DIVISION OF VACUUM CLEANER CORP. OF AMERICA
17th & Indiana Ave., Philadelphia 32, Pa.

Cordomatic®

LIGHTWEIGHT PHENOLIC SHOP LIGHT HANDLES



Model
100-HA

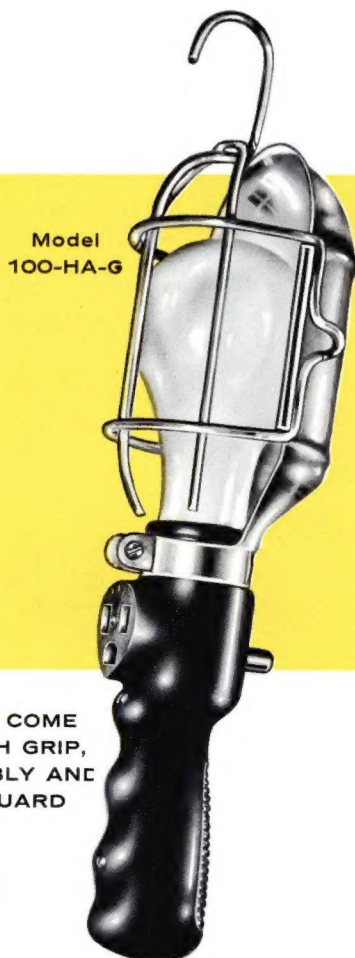

Model
100-HA-G

BOTH MODELS COME
COMPLETE WITH GRIP,
SWITCH ASSEMBLY AND
REFLECTOR GUARD



With emphasis on lightness and ease of handling, the CORDOMATIC De Luxe Series SHOP LIGHT HANDLE is a completely new concept in portable lighting attachments. Crack-proof, non-conductive and heat resistant, the phenolic pistol-grip includes the time proven LEVOLIER switch and socket, built-in strain relief and side convenience outlet . . . all in one sturdy, compact, Underwriters' approved handle. New type heavy duty, all steel, all chrome reflector with swing-open guard is easy to keep clean, permits instant bulb changing, gives off minimum heat and maximum light reflection. One piece reinforced hanger hook is guaranteed never to loosen or fall off. Available with a standard 2-conductor side convenience outlet or with a grounded reflector guard and grounding type side convenience outlet for use with grounded portable power tools.


SPECIFICATIONS

MODEL	POWER OUTLET	RATING	TYPE SWITCH	WEIGHT
100 HA	2-Conductor	15 Amp—125V	Levolier	10 oz.
100 HA-G	Grounding Type	15 Amp—125V	Levolier	10 oz.
200 HA	2-Conductor	15 Amp—125V	Push-thru	10 oz.

Every Cordomatic Product is unconditionally GUARANTEED against defective workmanship and materials for one full year.

Cordomatic®

DIVISION OF VACUUM CLEANER CORP. OF AMERICA—17th to 18th & Indiana Ave., Philadelphia 32, Pa.

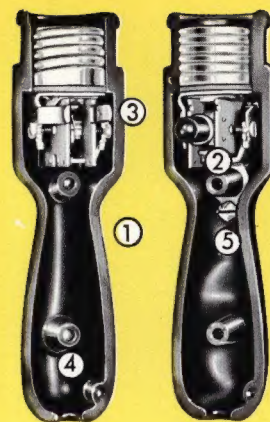


INTERNAL FEATURES

1. Grip moulded of lightweight, impact-resistant phenolic.
2. LEVOLIER switch and socket has switch button which flexes on and off.
3. Convenient built-in power outlet is always "live" whether switch is on or off.
4. Cord wraps around built-in strain relief post . . . no screws or clamps to injure cord jacket.

Model 100-HA-G ONLY

5. One piece grounding strap grounds reflector guard and power outlet.

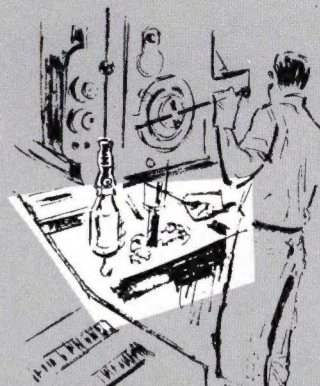

Ideal for both
INDUSTRIAL and
AUTOMOTIVE
applications



Cordomatic® "600-W"

COMBINATION WALL AND CEILING MOUNTING

GARAGE LITE REEL



WALL MOUNTED
180° Free Swivel

ALL NEW FEATURES

- Shatter proof phenolic pistol-grip handle
- Power outlet in handle
- Built-in strain relief
- Heavy-duty steel reflector
- Locks and releases with finger tip control at any desired length
- Heavy duty spring motor is dust proof and lifetime lubricated
- Optional wall or ceiling mounted with heavy gauge combination mounting bracket
- Swing open guard permits instant bulb changing
- One piece hanger hook
- Fool proof gravity action locking mechanism
- UL approved—guaranteed one year


SPECIFICATIONS

MODEL	CORD	RATING	LENGTH	DIAMETER	WIDTH	WEIGHT EACH
600-W	18/2-SVO	6 AMP.	20'	6½"	2"	4¾ lbs.

Every Cordomatic Product is unconditionally GUARANTEED
against defective workmanship and materials for one full year.



CEILING MOUNTED
full 360° rotation

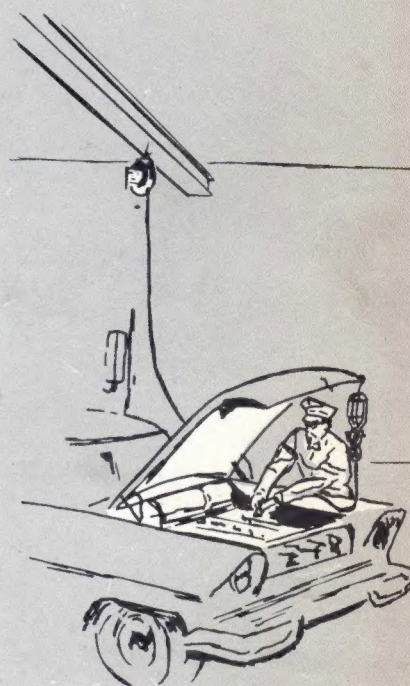

Ideal for all
AUTOMOTIVE
applications



CHANGE FROM CORD TO

Cordomatic®

Cordomatic®

PORTABLE JOB LITE REEL


SNAP-OPEN LIGHT GUARD
All steel. Opens easily for quick bulb change

PISTOL GRIP HANDLE
of impact resistant phenolic. Impervious to grease and oil

SWIVEL
allows complete lighting flexibility . . . up or down

BUILT-IN POWER OUTLET
in handle, for power tools and appliances

20-FOOT CORD
pulls out to any desired length . . . locks RETRACTS AUTOMATICALLY



CONVENIENT BUILT-IN
POWER OUTLET



EASILY CARRIED TO
AND FROM ANY JOB

MODEL 600JL

The perfect portable lighting tool. This CORDOMATIC PORTABLE JOB LITE REEL gives power as well as light. For transmission work, body repair, spot painting, brake work, etc. Life-time lubricated spring motor. Lights up—speeds up any job. Hanging hook on back of case permits wall mounting.

SPECIFICATIONS

MODEL	CORD	RATING	LENGTH	DIAMETER	WIDTH	WEIGHT
600JL	18/2 SJO	7 AMP.	20'	7"	2"	4¾ lbs.

Accommodates 150 watt flood light, spot light, or incandescent bulb.

Cordomatic®

PORTABLE OUTLET REEL

AUTOMATIC ELECTRIC SERVICE WHEREVER NEEDED

Smartest idea yet for portable electric power in the shop. Just plug in cord . . . carry PORTABLE OUTLET REEL where you want to use it. Cord pulls out to any desired length . . . locks . . . automatically retracts when not in use. 3-Way outlet operates several tools or other electrical equipment at same time. Ends dangling, hazardous cords. Fully guaranteed.

MODEL 600-PO



3 POWER
OUTLETS
OPERATE
SEVERAL
TOOLS

SPECIFICATIONS

MODEL	CORD	RATING	LENGTH	DIAMETER	THICKNESS	WEIGHT
600-PO	16/2-HPN	10 AMP	15'	6½"	1¾"	2½ lbs.

ALL CORDOMATIC PRODUCTS UNCONDITIONALLY GUARANTEED FOR ONE FULL YEAR

Cordomatic®

DIVISION OF VACUUM CLEANER CORP. OF AMERICA
17th & Indiana Ave., Philadelphia 32, Pa.

CHANGE FROM CORD TO

Cordomatic

CORDOMATIC'S FOOL-PROOF GRAVITY ACTION LOCKING MECHANISM

All reel products shown below contain Cordomatic's unique Gravity or Positive Action Locking Mechanism.* This time and money saving feature enables the reel to lock and release with finger-tip control at any desired length. The mechanism cannot break or jam, is dust-proof, lifetime lubricated, and has nothing to clean or oil. *Balance reel has special tension knob for different tool weights.



Wall or ceiling mounting. No junction boxes needed.

GARAGE LITE REEL MODEL 600W

Mounted on ceiling or wall, gives light where and when needed. Fool-proof gravity action locking mechanism, with built in strain relief. Locks and releases easily at any desired length. Power outlet in handle. Heavy duty spring motor is dust-proof and lifetime lubricated.

GARAGE LITE REEL

Model No.	Type Cord	Cord Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
600W	18-2 SJO	20'	6	27 lbs.	\$10.95



HEAVY DUTY DROP LIGHT REELS

Wherever portable light and power is needed — Fool-proof gravity action — impact resistant, pistol grip phenolic-handle with convenience outlet. Convenient swing open guard with one piece hanger hook.

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
700	18-2 SJO	20'	6	35 lbs.	\$14.95
800	18-2 SJO	30'	6	43 lbs.	18.95
900	18-2 SJO	40'	6	49 lbs.	22.95
S/900	16-2 SJO	30'	6	48 lbs.	23.95

DROP LIGHT REELS — GROUNDING TYPE

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
800G	18-3 SJO	20'	6	44 lbs.	\$19.95
900G	18-3 SJO	30'	6	49 lbs.	23.95
S/900G	16-3 SJO	25'	6	49 lbs.	24.95

DO-IT-YOURSELF-REELS

Designed to enable user to "customize" his own application by a simple connection of the cord leads to his equipment. Exposed lead ends are fitted with brass eyelets for ease of making solderless electrical connections.



DO-IT-YOURSELF REELS (LESS HANDLE and GUARD)

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
700LA	18-2 SJO	20'	6	32 lbs.	\$13.25
800LA	18-2 SJO	30'	6	40 lbs.	17.25
900LA	18-2 SJO	40'	6	45 lbs.	21.25
S/900LA	16-2 SJO	30'	6	45 lbs.	22.25

DO-IT-YOURSELF REELS — GROUNDING TYPE

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
800G-LA	18-3 SJO	20'	6	38 lbs.	\$18.25
900G-LA	18-3 SJO	30'	6	44 lbs.	22.25
S/900G-LA	16-3 SJO	25'	6	43 lbs.	23.25

BALANCE REELS

700BR—used to suspend electrical tools—includes grounding type twist lock connector.

700BR-LA—same as above—except no twist lock connector.

700CR—used to suspend non-electrical devices.



BALANCE REELS (ELECTRIC)

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
700BR	18-3 SJO	10'	6	27 lbs.	\$21.95
700BR-LA	18-3 SJO	10'	6	25 lbs.	18.95

BALANCE REELS — FLEXIBLE CABLE

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
700CR	FLEX. CABLE	6'	6	24 lbs.	\$16.95

STATIC DISCHARGE REELS



Ideal for bulk fuel transfer. Makes static grounding safer . . . automatically. Unit has nylon covered stranded steel cable and rubber jacketed alligator clip. Wall or ceiling mounting.

STATIC DISCHARGE REELS

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
700SDR	FLEX. CABLE	20'	6	29 lbs.	\$19.95
800SDR	FLEX. CABLE	45'	6	42 lbs.	23.95




MECHANICS JOB LIGHT REEL

Versatile portable light unit featuring a heavy duty, steel guard, phenolic pistol grip handle with convenience outlet. Takes up to 150 watt flood light, has adjustable universal swivel.

MECHANICS JOB LIGHT REEL

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
600JL	18-2 SJO	20'	6	38 lbs.	\$13.95

MECHANICS PORTABLE OUTLET REEL




Automatic electric service wherever needed — Smartest idea yet for portable electric power in the shop. Just plug in cord . . . carry Portable Outlet Reel where you want to use it. Cord pulls out to any desired length . . . locks . . . automatically retracts when not in use. 3-Way outlet operates several tools or other electrical equipment at same time. Ends dangling, hazardous cords. Fully guaranteed.

MECHANICS PORTABLE OUTLET REEL

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
600PO	16-2 HPN	15'	6	18 lbs.	\$ 8.05

HEAVY DUTY DROP CORDS



Designed to take roughest handling. Impact resistant pistol grip handle with built-in electrical outlet. Swing open guard and reflector. Also available in grounding type.

HEAVY DUTY DROP CORDS

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
125DC	18-2 SJ	25'	5	9 lbs.	\$ 3.35
150DC	18-2 SJ	50'	5	19 lbs.	4.60

HEAVY DUTY DROP CORDS — GROUNDING TYPE

Model No.	Type Cord	Length	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
125DCG	18-3 SJ	25'	5	13 lbs.	\$ 6.30
150DCG	18-3 SJ	50'	5	24 lbs.	9.30

DELUXE HANDLE ASSEMBLY



Crack-proof, heat resistant pistol grip phenolic handle with electrical outlet. Built-in strain relief all steel reflector with swing open guard. One piece reinforced hanger hook.

HANDLE ASSEMBLY

Model No.	Type Cord	Std. Carton	Wt. Std. Carton	Dealer Cost (ea.)
100HA	Levolier Switch	6	6 lbs.	\$ 3.95
100HAG	Levolier Switch	6	6 lbs.	3.95
200HA	Push Type Switch	5	4 lbs.	1.97

REPLACEMENT PARTS

	Dealer Cost
B-101 Guard "Swing Open" Chrome Plated	\$.95
B-102 Guard "Swing Open" Painted65
B-103 Lamp Cage (For Model 800JL)	2.25
B-104 Lamp Cage (For Model 600JL)	2.00
B-105 Reflector Guard (For Model 700DL)	3.00
B-111 Handle (Phenolic)—Less B-116 Switch and Socket—U/L Approved (Deluxe)	1.75
B-112 Handle—Less Switch and Socket—Neoprene (For Model 600 only)65
B-113 Handle (Phenolic)—Less B-116 Switch and Socket—U/L Approved (Grounding Type)	1.75
B-116 Levolver Switch and Socket—U/L Approved (Standard and Grounding Type) Fits B-111, B-113 Handles	1.50
B-117 Switch and Socket—Push Thru Type (For Model 600 only)30
B-121 Cord No. 18/2 SJO Neoprene—U/L Approved—per ft.10
B-122 Cord No. 18/3 SJO Neoprene—U/L Approved—per ft. (Grounding Type)12
B-123 Cord No. 18/2 SVO Neoprene (For Model 600 and 600-W)—per ft.08
B-124 Cable Assembly complete for Model 700 CR	2.50
B-125 Cable only (Stranded Steel) per ft. (1/8 or 5/32—Specify size)20
B-126 Stop Ball (Neoprene)25
B-127 Alligator Copper Clip (For Models 700 S.D.R. and 800 S.D.R.)	1.75
B-128 Rubber Jacket for Clip (Models 700 S.D.R. and 800 S.D.R.)	1.00
B-129 Bakelite Cone—Complete (For Multiple Outlet Reels)	1.00
B-131 Wall Bracket (For all Models Except 600-W)75
B-132 Twist-Lock Plug—Male (For Model 700-BR) Grounding Type	1.00
B-133 Twist-Lock Plug—Female (For Model 700-BR) Grounding Type	1.50
B-134 Twist-Lock Plug—Male (2 Wire)60
B-135 Twist-Lock Plug Female (2 Wire)80
H-212 Handle, phenolic pistol grip, for push thru switch, H-217	1.75
H-217 Switch and Socket, push thru type, (Fits H-212 Handle)28

TERMS OF SALE: 2% 10th Prox. Net E.O.M. Invoice date at time of shipment.

DELIVERY: F.O.B. Philadelphia, Pennsylvania. Freight prepaid on 250 lbs.

REPAIRS: Send direct to nearest service center listed below.

Cordomatic
1724 W. Indiana Avenue
Philadelphia, Pa.

Vernon Electric Co.
233 W. Jefferson Blvd.
Los Angeles 7, Calif.

Mosey & Mosey Service Co.
1218 - 10th Avenue
Seattle 22, Washington

WARRANTEE: Cordomatic products all unconditionally guaranteed for one year against defective workmanship and material.

Cordomatic

1724 W. INDIANA AVENUE
PHILADELPHIA 32, PA.

EXPORT DIVISION: BALTHEX INTERNATIONAL—SCHAFF BLDG., PHILA. 2, PA., U. S. A.